

Tools required

- screwdriver
- drill and 3/32" bit
- additional drill bit, screws and wall anchors for mounting (*not supplied*)


Installation

1. Using a screwdriver, remove the power cord side end cap.
2. Slide out the mounting bracket.
3. Place the mounting bracket on wall in desired location.
4. Using a pencil mark the location of the holes.
5. Drill a 3/16" hole.
6. Insert a wall anchor.
7. Place the mounting bracket over the holes.
8. Install screws.
9. Slide the LED assembly fixture over the mounting bracket. (*see graphic installation below*)
10. Install graphic according to instructions below.
11. Reinstall the end cap.
12. Attach power supply and plug into receptacle.

Graphic Installation

1. Ensure graphic width is equal to or less than the extrusion length by measuring inside of end caps.
2. In the bottom of graphic acrylic drill 3/32" diameter holes centred 5/32" up from edge.
3. Insert the supplied 1/8" diameter rods (5/8" long) into your drilled holes and centre.
4. Slide unit into groove.
5. Continue installation instructions above.

Slide assembly over secured mounting bracket.

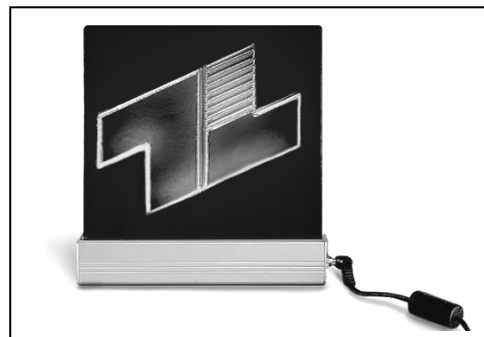

Attach end cap and secure with screws. Attach power supply.